



TRUCK-MOUNTED
CONCRETE PUMP




TECHNICAL DATA

Pump Battery		P 2020		P 2023-110/75	P 2023-110/75
Hydraulic drive	l/min	320		380	450
Performance	K = piston sided, S = rod sided	K	S		
Max. theor. output	m ³ /h	51	90	96	114
Max. number of strokes	min.	14	24	19	23
Max. concrete pressure	bar	126	70	85	85

Performance data is max. theoretical (Max. output and max. pressure cannot be achieved simultaneously.)

Placing Boom		24 ZR
Delivery line diameter		DN 125
Length of end hose	m	3,0
Vertical reach	m	23,5
Horizontal reach	m	19,5
Number of articulations		4
Height of articulations	m	4,02 / 10,87 / 14,87 / 18,97
Slewing range		370°
Outrigger load, front	kN	140
Outrigger load, rear	kN	90

MINIMUM REQUIRED OPERATING HEIGHT (INDOORS)

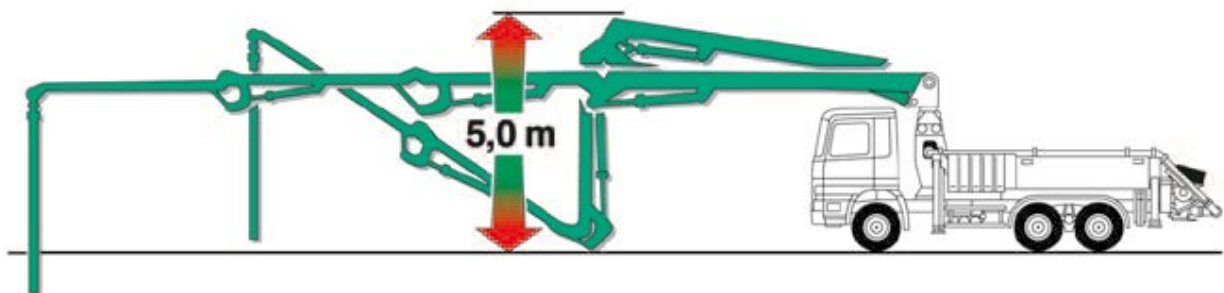

TRUCK AND PLACING BOOM DIMENSIONS.

